



SB-RE 8A

Relay module for top rail mounting

### Terminal


Plug terminal  
12pin, max. 2,5 mm<sup>2</sup>  
4x switch-over contact

Plug terminal  
16pin, max.1,5 mm<sup>2</sup>  
8x relay coil

Plug-screw terminal  
12pin, max. 2,5 mm<sup>2</sup>  
4x switch-over contact

### Technical Data

Relay coil	12V, 24V, 48V, AC or DC order the voltage
Relay contact	max. 250V, max. 16A please contact us for inductive or capacitive load.
Continuous current	8 A
Insulation coil-contact	4 kV
operating temperature	-10 - +50°C
storage temperature	-30 - +80°C
construction	PCB mount. TS35, EN50022
weight	170g
dimensions (WxHxD)	71 x 101 x 50 mm

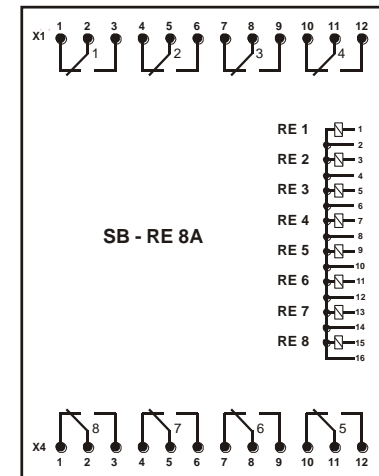

**RINCK ELECTRONIC GMBH**  
Kleekamp 6  
D-27356 Rotenburg (Wümme)  
[www.rinck-electronic.de](http://www.rinck-electronic.de)  
[info@rinck-electronic.de](mailto:info@rinck-electronic.de)

## RELAY MODULE SB-RE 8 A

Input	8x relay-coil 24V DC, 24V AC or other (max.48V)
Output	8x switch-over contact

**S 150**

E\_SB-RE8A

23.03.15